

Metal Series Key Features



- Slim Style
- Wide Power Range: 10W-300W
- Universal Input:
 - 10W-30W: 85-264V AC/105-370V DC
 - 50W-300W: 85-264V AC/105-350V DC
- Screw Terminals , IP20 (fingersafe)
- Power Fault protection
 - EN61000-3-2
 - EN61000-3-3 (50W to 300W models)
- Overcurrent/Overvoltage protection
- Voltage ± 10% adjustment
- DIN rail or Panel Surface Mount
- Approvals:
 - CE marked
 - UL 508 listed
 - UL 1950 recognized
 - EN50178 compliant
 - EMC Directives
 - EN50081-2
 - EN61000-6-2
 - LVD EN60950:2000

PS3L Metal Power Supplies



10 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-A05AFF	5V DC	2A
PS3L-A12AFF	12V DC	0.9A
PS3L-A24AFF	24V DC	0.5A



15 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-B05AFF	5V DC	3A
PS3L-B12AFF	12V DC	1.4A
PS3L-B24AFF	24V DC	0.7A



30 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-C05AFF	5V DC	6A
PS3L-C12AFF	12V DC	2.5A
PS3L-C24AFF	24V DC	1.3A



50 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-D12AFF	12V DC	4.3A
PS3L-D24AFF	24V DC	2.2A



100 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-E12AFF	12V DC	8.5A
PS3L-E24AFF	24V DC	4.5A



150 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-F12AFF	12V DC	13A
PS3L-F24AFF	24V DC	6.5A




300 Watt Power Supply

Part Number	Rated Voltage	Rated Current
PS3L-G24AFF	24V DC	12.5A

Metal Power Supply Dimensions


PS3L-A (10W)/PS3L-B (15W)

Height 97.0 mm
Width 35.0 mm
Depth 86.0 mm





PS3L-C (30W)

Height 96.0 mm
Width 35.0 mm
Depth 114.5 mm




PS3L-D (50W)

Height 97.0 mm
Width 37.0 mm
Depth 147.5 mm

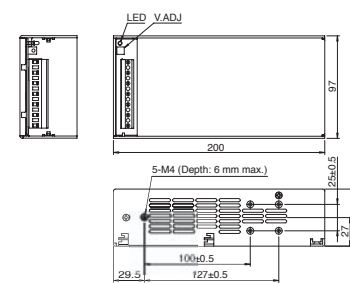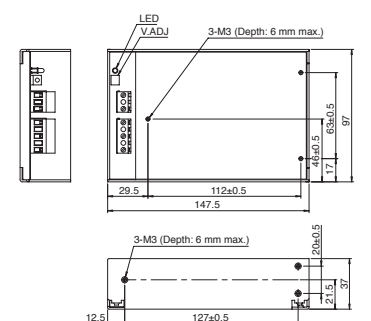


PS3L-E (100W)

Height 97.0 mm
Width 54.0 mm
Depth 200.0 mm

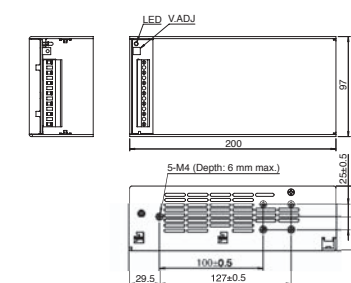

PS3L-F (150W)

Height 97.0 mm
Width 62.0 mm
Depth 200.0 mm

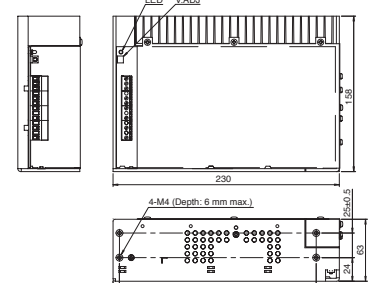

PS3L-G24 (300W)

Height 158.0 mm
Width 63.0 mm
Depth 230.0 mm

